



HOSHIZAKI



Hoshizaki – Precision Cooling for the Demands of Modern Kitchens. Trusted by chefs worldwide for innovation, quality, and efficiency.

 Sakkura Industrial Equipment Trading
 @official_sakkura

 09173246776/ 09171183349
 San Pedro, Laguna

 Message us for inquiries
or
Request a quote!




Hoshizaki Corporation (Hoshizaki Electric Co., Ltd) was established in February, 1947 in Nagoya, Japan by **Mr. Shigetoshi Sakamoto**. Over the years, Hoshizaki Corporation has manufactured and sold a variety of products to include stoves, fridges, vending machines, water purifiers, servers and dispensers, ice-makers and refrigerated showcases.

For more than 75 years, Hoshizaki Corporation continues to innovate and specializing in Refrigerator and Ice-Machines products, becoming the world's largest manufacture and marketer of food service. Through the vision of best customer satisfaction followed by greatest quality product and best service, Hoshizaki is now proudly recognized as the **No. 1 Company in Japan**.




ICE MAKER

Together with the vision to prioritize the customer satisfaction, Hoshizaki has invented the original technology for the Basic Designs of Evaporators. As the result, some Hoshizaki Ice Machine products use the **Stainless Steel Evaporator** which produce the best quality ice that is already proven melt very slowly (up to 24 hours time) compared to any other ice produced by different ice machines brand.

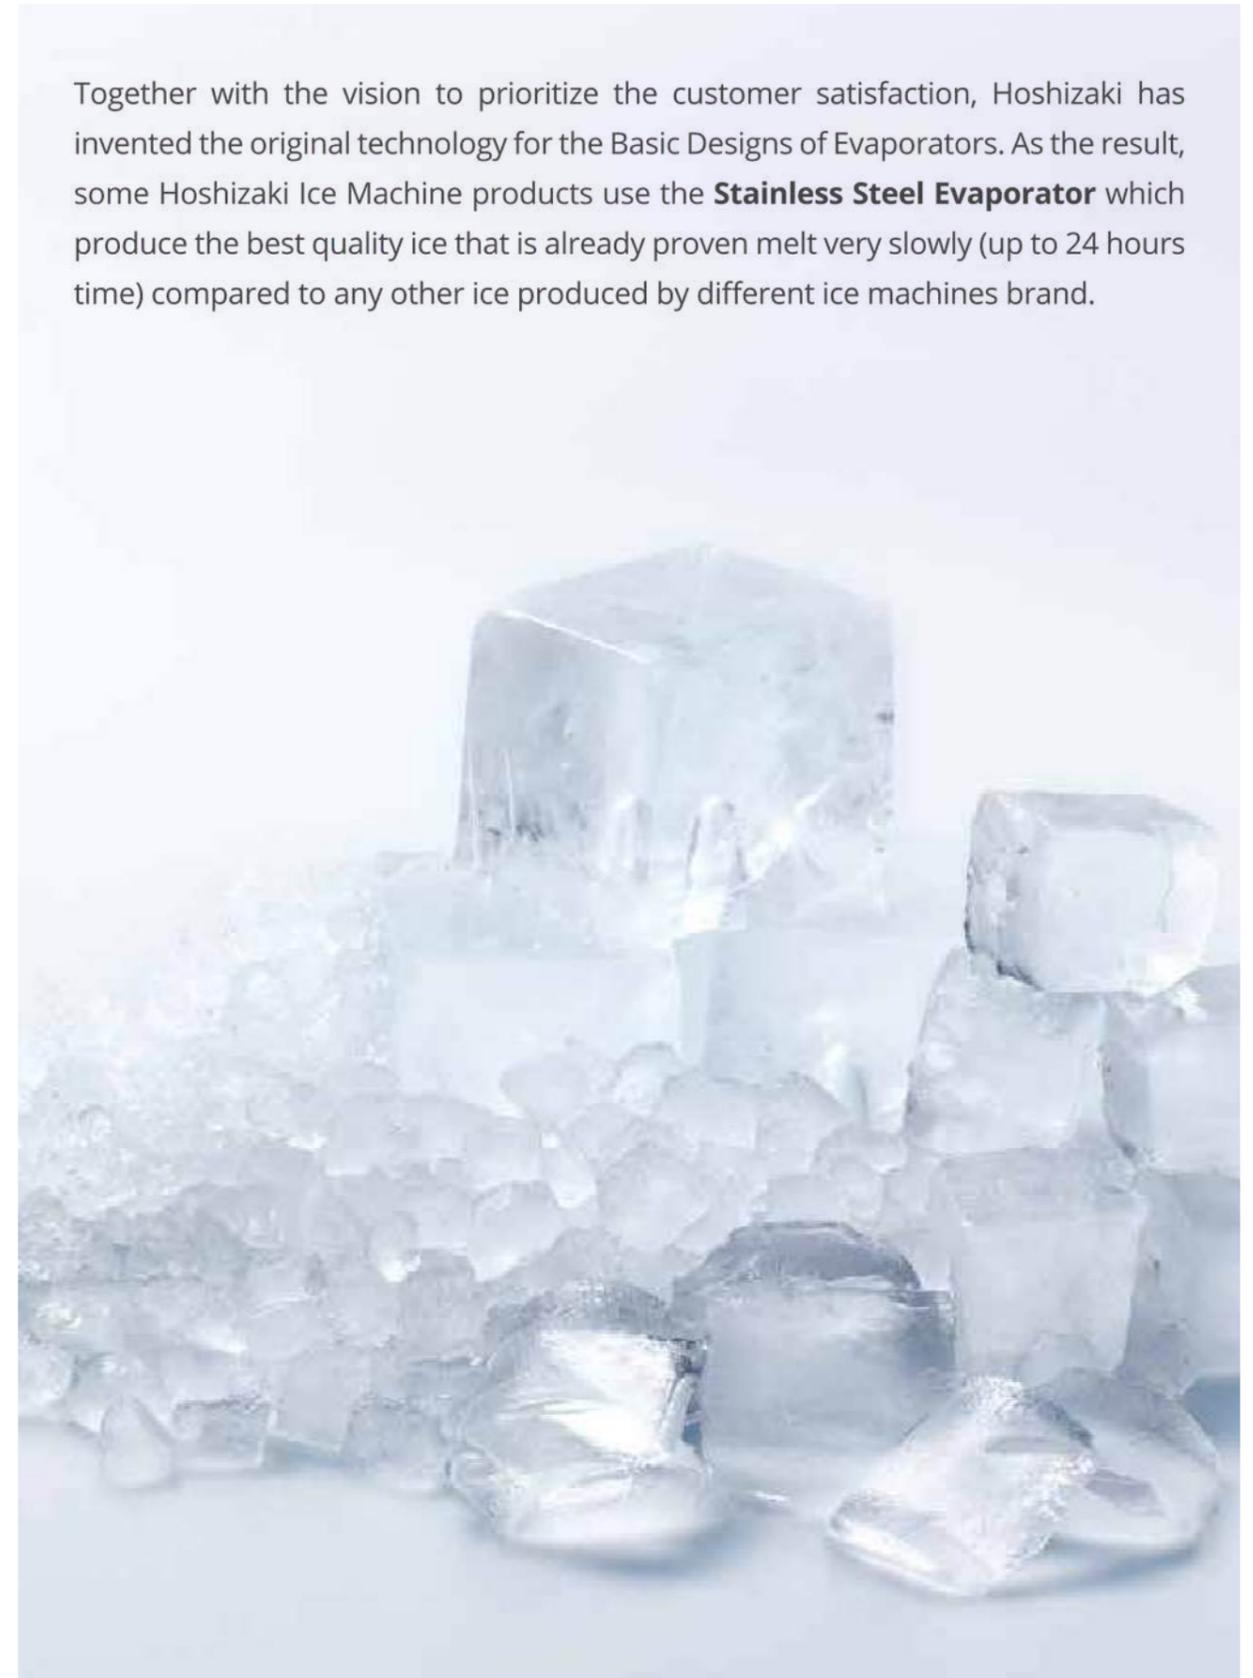


CUBE STANDARD




MODEL	IM-45CA	IM-65A
Dimension WxDxH (+ Leg)	660 x 570 x 695 (+150) mm	660 x 570 x 800 (+150) mm
Electrical Consumption	310 W	390 W
Ice Production Per 24h (approx.)	44 kg (AT21°C / WT15°C) 35 kg (AT32°C / WT21°C)	56 kg (AT21°C / WT15°C) 45 kg (AT32°C / WT21°C)
Ice Production Per Cycle (approx.)	0.67 kg / 30 pcs	0.94 kg / 42 pcs
Storage Capacity (approx.)	15 kg	26 kg

CUBE STANDARD IM-100A/130A




CUBE 21 IM-130A-21




MODEL	IM-100A	IM-130A
Dimension WxDxH (+ Leg)	660 x 570 x 1200 (+150) mm	660 x 570 x 1200 (+150) mm
Electrical Consumption	680 W	630 W
Ice Production Per 24h (approx.)	98 kg (AT21°C / WT15°C) 81 kg (AT32°C / WT21°C)	116 kg (AT21°C / WT15°C) 90 kg (AT32°C / WT21°C)
Ice Production Per Cycle (approx.)	1.8 kg / 80 pcs	1.8 kg / 80 pcs
Storage Capacity (approx.)	52 kg	52 kg

CUBE STANDARD IM-220AA / 240NE




CUBE 21 IM-240NE-21




MODEL	IM-220AA
Dimension WxDxH	560 x 639 x 775 mm
Electrical Consumption	950 W
Ice Production Per 24h (approx.)	180 kg (AT21°C / WT15°C) 160 kg (AT32°C / WT21°C)
Ice Production Per Cycle (approx.)	3.8 kg / 416 pcs
Storage Capacity (approx.)	Various (according to bin size)

CUBE STANDARD IM-240DNE/XNE




MODEL	IM-240DNE	IM-240XNE
Dimension WxDxH	1084 x 700 x 500 mm	1084 x 700 x 500 mm
Electrical Consumption	1330 W	1330 W
Ice Production Per 24h (approx.)	205 kg (AT21°C / WT15°C) 160 kg (AT32°C / WT21°C)	210 kg (AT21°C / WT15°C) 190 kg (AT32°C / WT21°C)
Ice Production Per Cycle (approx.)	3.2 kg / 140 pcs	3.2 kg / 140 pcs
Storage Capacity (approx.)	Various (according to bin size)	Various (according to bin size)

CRESCENT




MODEL	KM-40C	KM-60C	KM-80C
Dimension WxDxH	452 x 610 x 842 mm	605 x 610 x 842 mm	605 x 712 x 842 mm
Electrical Consumption	250 W	305 W	405 W
Ice Production Per 24h (approx.)	41 kg (AT21°C / WT15°C) 33 kg (AT32°C / WT21°C)	56 kg (AT21°C / WT15°C) 45 kg (AT32°C / WT21°C)	74 kg (AT21°C / WT15°C) 57 kg (AT32°C / WT21°C)
Ice Production Per Cycle (approx.)	0.74 kg / 80 pcs	1.00 kg / 110 pcs	1.16 kg / 130 pcs
Storage Capacity (approx.)	16 kg	23 kg	34 kg


CRESCENT



MODEL	KM-130C	KM-470AJ	KM-590DJ
Dimension WxDxH	630 x 719 x 1200 mm	762 x 695 x 825 mm	1219 x 695 x 695 mm
Electrical Consumption	593 W	1850 W	2080 W
Ice Production Per 24h (approx.)	120 kg (AT21°C / WT15°C) 90 kg (AT32°C / WT21°C)	480 kg (AT21°C / WT15°C) 380 kg (AT32°C / WT21°C)	590 kg (AT21°C / WT15°C) 500 kg (AT32°C / WT21°C)
Ice Production Per Cycle (approx.)	1.86 kg / 208 pcs	9.7 kg / 960 pcs	12.9 kg / 1440 pcs
Storage Capacity (approx.)	55 kg	Various (according to bin size)	Various (according to bin size)


CRESCENT

MODEL KMD-201AB
MODEL KMD-270AB

	MODEL KMD-201AB	MODEL KMD-270AB
Dimension WxDxH	560 x 625 x 610 mm	560 x 625 x 610 mm
Electrical Consumption	663 W	984 W
Ice Production Per 24h (approx.)	175 kg (AT21°C / WT15°C) 140 kg (AT32°C / WT21°C)	255 kg (AT21°C / WT15°C) 221 kg (AT32°C / WT21°C)
Ice Production Per Cycle (approx.)	3.8 kg / 416 pcs	5.3 kg / 624 pcs
Storage Capacity (approx.)	Various (according to bin size)	Various (according to bin size)

NUGGET FM-150KE-50-N/300AKE-N-SB
Compressed Flake Ice

FLAKE FM-300AKE


MODEL
MODEL FM-300AKE-SB
MODEL FM-300AKE-N-SB

	MODEL FM-300AKE-SB	MODEL FM-300AKE-N-SB
Dimension WxDxH (+ Leg)	560 x 700 x 780 mm	560 x 700 x 780 mm
Electrical Consumption	1000 W	1000 W
Ice Production Per 24h (approx.)	260 kg (AT21°C / WT15°C) 200 kg (AT32°C / WT21°C)	225 kg (AT21°C / WT15°C) 180 kg (AT32°C / WT21°C)
Storage Capacity (approx.)	Various (according to bin size)	Various (according to bin size)

NUGGET FM-480AKE-N-SB
Compressed Flake Ice

FLAKE FM-480AKE-SB

MODEL FM-480AKE-SB
MODEL FM-480AKE-N-SB


	MODEL FM-480AKE-SB	MODEL FM-480AKE-N-SB
Dimension WxDxH	560 x 700 x 780 mm	560 x 700 x 780 mm
Electrical Consumption	1590 W	1650 W
Ice Production Per 24h (approx.)	430 kg (AT21°C / WT15°C) 330 kg (AT32°C / WT21°C)	360 kg (AT21°C / WT15°C) 290 kg (AT32°C / WT21°C)
Storage Capacity (approx.)	Various (according to bin size)	Various (according to bin size)

NUGGET FM-600AKE-N-SB
Compressed Flake Ice

FLAKE FM-600AKE-SB

MODEL FM-600AKE-SB
MODEL FM-600AKE-N-SB

	MODEL FM-600AKE-SB	MODEL FM-600AKE-N-SB
Dimension WxDxH	560 x 700 x 780 mm	560 x 700 x 780 mm
Electrical Consumption	1900 W	1950 W
Ice Production Per 24h (approx.)	540 kg (AT21°C / WT15°C) 445 kg (AT32°C / WT21°C)	460 kg (AT21°C / WT15°C) 400 kg (AT32°C / WT21°C)
Storage Capacity (approx.)	Various (according to bin size)	Various (according to bin size)

DICE




MODEL SRM-45A

Dimension WxDxH (+ Leg)	500 x 580 x 750 mm
Electrical Consumption	287 W
Ice Production Per 24h (approx.)	41 kg (AT21°C / WT15°C) 35 kg (AT32°C / WT21°C)
Ice Production Per Cycle (approx.)	0.5 kg / 55 pcs
Storage Capacity (approx.)	14 kg

MODEL SRM-60A

Dimension WxDxH (+80) mm	660 x 670 x 970 (+80) mm
Electrical Consumption	370 W
Ice Production Per 24h (approx.)	60 kg (AT21°C / WT15°C) 54 kg (AT32°C / WT21°C)
Ice Production Per Cycle (approx.)	0.81kg / 80 pcs
Storage Capacity (approx.)	31.4 kg


DICE



MODEL SRM-105A

Dimension WxDxH (+ Leg)	660 x 670 x 1120 (+80) mm
Electrical Consumption	530 W
Ice Production Per 24h (approx.)	90 kg (AT21°C / WT15°C) 70 kg (AT32°C / WT21°C)
Ice Production Per Cycle (approx.)	1.17 kg / 126 pcs
Storage Capacity (approx.)	43.6 kg

DICE



MODEL SRM-125UB

Dimension WxDxH	660 x 670 x 850 mm
Electrical Consumption	590 W
Ice Production Per 24h (approx.)	106 kg (AT21°C / WT15°C) 81 kg (AT32°C / WT21°C)
Ice Production Per Cycle (approx.)	1.17 kg / 126 pcs
Storage Capacity (approx.)	24 kg

ICE STORAGE BIN



MODEL B-301SA

Dimension WxDxH (+ Leg)	558.8 x 820 x 1016 (+90) mm
Door Style	Upward Opening
Scoop	1
Effective Capacity (approx.)	144 kg
Weight Gross	49 kg

MODEL B-501SA

Dimension WxDxH (+90) mm	762 x 820 x 1016 (+90) mm
Door Style	Upward Opening
Scoop	1
Effective Capacity (approx.)	217 kg
Weight Gross	57 kg

MODEL B-801SA

Dimension WxDxH (+90) mm	1219.2 x 820 x 1016 (+90) mm
Door Style	Upward Opening
Scoop	1
Effective Capacity (approx.)	348 kg
Weight Gross	86 kg

ICE STORAGE BIN COMPATABILITY

ICE MACHINE \ ICE BIN	FM-300 FM-480 IM-220AB KMD-201 KMD-270	KM-470AJ FM-750 FM-1000 SRM-270AB	FM-480 X 2	KMD-201 X 2 KMD-270 X 2 IM-220AB X2 FM-300 X 2 FM-480 X 2 IM-240DNE x 1	KM-590DJ	IM-240DNE
B-301SA Top Kit	 No Top Kit					
B-501SA Top Kit	 8D	 No Top Kit				
B-801SA Top Kit	 8D + 18D	 18D	 4DM	 4DM + 4DR	 No Top Kit	 IMD2

ICE STORAGE BIN SPECIFICATIONS

Model Name	Storage Capacity (kg)	Product Dimension (mm)	Packing Dimension (mm)	Net / Gross Weight (kg)	Country of Origin
	Approx. / Max	W x D x H	W x D x H		
B-301SA	188 / 144	558.8 x 820 x 1016 ~ 1106	670 x 920 x 1190	37 / 49	CN
B-501SA	173 / 217	760 x 820 x 1016 ~ 1106	900 x 940 x 1190	47 / 62	CN
B-801SA	286 / 348	1219.2 x 820 x 1106 ~ 1136	1360 x 940 x 1190	64 / 86	CN

ICE DISPENSER

Cold drinks are very much favoured especially in casual or self-service environments; operators can lessen the work or manpower with an ice dispersing machine. Hozshizaki's cubelet ice dispensers meet the need with its 2-in-1 function that makes and provides ice to customers through its compact and space saving dispensers.



NUGGET

Compressed Flake Ice



MODEL DCM-60KE

Dimension WxDxH (+ Leg)	350 x 585 x 645 (+50 ~ 65) mm
Electrical Consumption	280 W
Ice Production Per 24h (approx.)	50 kg (AT21°C / WT15°C) 38 kg (AT32°C / WT21°C)
Ice Production 40gm Cup (approx.)	78 cups / 30 min (AT21°C / WT15°C) 76 cups / 30 min (AT32°C / WT15°C)
Storage Capacity (approx.)	1.9 kg



MODEL DCM-120KE

Dimension WxDxH (+ Leg)	350 x 585 x 765 (+50 ~ 65) mm
Electrical Consumption	480 W
Ice Production Per 24h (approx.)	105 kg (AT21°C / WT15°C) 85 kg (AT32°C / WT21°C)
Ice Production 40gm Cup (approx.)	154 cups / 30 min (AT21°C / WT15°C) 144 cups / 30 min (AT32°C / WT15°C)
Storage Capacity (approx.)	4.0 kg

ICE MAKER SPECIFICATIONS

Category	Ice Shape	Model Name	Self-Contained / Modular - Type	Production Capacity (kg / day)		Bin Capacity (Approx. kg)	Compatible Bins	Product Dimension (mm)		Packing Dimension (mm)	Net / Gross Weight (kg)	Country of Origin
				AT.21°C, WT.15°C	AT.32°C, WT.21°C			W x D x H (+ Leg)	W x D x H			
KM	Crescent	KM-40C	Self-Contained	41	33	16	NA	452 x 610 x 842 ~ 992	555 x 715 x 996	40 / 50	CN	
KM	Crescent	KM-60C	Self-Contained	56	45	23	NA	605 x 610 x 842 ~ 992	710 x 715 x 996	46 / 58	CN	
KM	Crescent	KM-80C	Self-Contained	74	57	34	NA	605 x 712 x 842 ~ 992	700 x 805 x 996	51 / 64	CN	
KM	Crescent	KM-130C	Self-Contained	120	90	55	NA	630 x 719 x 1200 ~ 1350	725 x 825 x 1357	69 / 81	CN	
KM	Crescent	KM-470AJ	Modular	480	380	Various		760 x 695 x 825	855 x 843 x 983	122 / 136	CN	
KM	Crescent	KM-590DJ	Modular	590	500	Various		1219 x 695 x 695	1312 x 843 x 855	136 / 154	CN	
KMD	Crescent	KMD-201AB	Modular	175	140	Various		560 x 625 x 610	668 x 727 x 783	57 / 73	CN	
KMD	Crescent	KMD-270AB	Modular	255	221	Various		560 x 625 x 610	668 x 727 x 783	57 / 73	CN	
IM	Cube - Standard	IM-30CA	Self-Contained	26	22	12	NA	398 x 510 x 695	490 x 610 x 870	39 / 49	CN	
IM	Cube - Standard	IM-45CA	Self-Contained	44	35	15	NA	660 x 570 x 695	760 x 680 x 870	52 / 65	CN	
IM	Cube - Standard	IM-65A	Self-Contained	56	45	26	NA	660 x 570 x 800	760 x 680 x 970	60 / 74	CN	
IM	Cube - Standard	IM-100A	Self-Contained	98	81	52	NA	660 x 570 x 1200	760 x 680 x 1370	76 / 95	CN	
IM	Cube - Standard	IM-130A	Self-Contained	116	90	52	NA	660 x 570 x 1200	760 x 680 x 1379	79 / 98	CN	
IM	Cube - 21	IM-130A-21	Self-Contained	100	75	52	NA	660 x 570 x 1200	760 x 680 x 1379	69 / 76	CN	
IM	Cube - Standard	IM-220AA	Modular	180	160	NA		560 x 639 x 775	644 x 728 x 878	69 / 76	CN	
IM	Cube - Standard	IM-240NE	Modular	205	160	110	NA	704 x 665 x 1510	805 x 760 x 1684	111 / 128	GB	
IM	Cube - 21	IM-240NE-21	Self-Contained	180	165	110	NA	704 x 665 x 1510	805 x 760 x 1684	111 / 128	GB	
IM	Cube - Standard	IM-240DNE	Modular	205	160	Various		1084 x 700 x 500	1196 x 825 x 640	88 / 101	GB	
IM	Cube - Standard	IM-240XNE	Modular	210	190	Various		1084 x 700 x 500	1196 x 825 x 640	84 / 98	GB	
FM	Flake	FM-150KE	Self-Contained	130	110	26	NA	640 x 600 x 711 ~ 800	746 x 706 x 887	71 / 82	GB	
FM	Nugget	FM-150KE-N	Self-Contained	120	100	32	NA	640 x 600 x 711 ~ 800	746 x 706 x 887	71 / 82	GB	
FM	Flake	FM-150KE-50	Self-Contained	130	110	57	NA	940 x 600 x 711 ~ 800	1046 x 706 x 887	81 / 94	GB	
FM	Nugget	FM-150KE-50-N	Self-Contained	120	100	65	NA	940 x 600 x 711 ~ 800	1046 x 706 x 887	81 / 94	GB	
FM	Flake	FM-300AKE-SB	Modular	260	200	Various		560 x 700 x 780	665 x 820 x 950	80 / 87	GB	
FM	Nugget	FM-300AKE-N-SB	Modular	225	180	Various		560 x 700 x 780	665 x 820 x 950	80 / 87	GB	
FM	Flake	FM-480AKE-SB	Modular	425	325	Various		560 x 700 x 780	665 x 820 x 950	95 / 102	GB	
FM	Nugget	FM-480AKE-N-SB	Modular	360	290	Various		560 x 700 x 780	665 x 820 x 950	95 / 102	GB	
FM	Flake	FM-600AKE-SB	Modular	540	445	Various		560 x 700 x 780	665 x 820 x 950	107 / 114	GB	
FM	Nugget	FM-600AKE-N-SB	Modular	460	400	Various		560 x 700 x 780	665 x 820 x 950	107 / 114	GB	
FM	Flake	FM-750AKE-SB	Modular	650	530	Various		762 x 700 x 780	873 x 820 x 947	133 / 143	GB	
FM	Flake	FM-1000AKE-SB	Modular	890	740	Various		762 x 700 x 780	873 x 820 x 947	146 / 156	GB	
SRM	Dice	SRM-45A	Self-Contained	41	35	14	NA	500 x 580 x 750	625 x 716 x 875	35 / 39.5	CN	
SRM	Dice	SRM-60A	Self-Contained	60	54	31.4	NA	660 x 670 x 970 ~ 1050	785 x 860 x 1100	58 / 65	CN	
SRM	Dice	SRM-80A	Self-Contained	72	57	31.4	NA	660 x 670 x 970 ~ 1050	785 x 860 x 1100	56.5 / 63	CN	
SRM	Dice	SRM-105A	Self-Contained	90	70	43.6	NA	660 x 670 x 1120 ~ 1200	785 x 860 x 1250	61 / 69	CN	
SRM	Dice	SRM-125A	Self-Contained	106	81	43.6	NA	660 x 670 x 1120 ~ 1200	785 x 860 x 1250	64.5 / 72	CN	
SRM	Dice	SRM-125UB	Self-Contained	106	81	24	NA	660 x 670 x 850	780 x 850 x 1050	58 / 75	CN	
SRM	Dice	SRM-270AB	Modular	242	194	Various		760 x 620 x 560	850 x 710 x 750	59 / 78	CN	
DCM	Dispenser	DCM-60KE	Self-Contained	50	38	1.9	NA	350 x 585 x 645 ~ 695	440 x 655 x 906	47 / 56	GB	
DCM	Dispenser	DCM-120KE	Self-Contained	105	85	4	NA	350 x 585 x 765 ~ 815	440 x 655 x 1026	57 / 66	GB	



As our mission and plan to achieve and maintain optimum your satisfaction, we proudly introduce our technology based on years of researching and innovating for better quality of Chillers and Freezers: **A-Fit Technology.**

Upright Refrigerator



MODEL HR-78MA-S

Dimension WxDxH	700 x 800 x 2050 mm
Electrical Consumption	238 W
Chiller Temperature Control	-6°C ~ 12°C
Number of Shelves	4
Effective Capacity	569 L



MODEL HR-128MA-S

Dimension WxDxH	1200 x 800 x 2050 mm
Electrical Consumption	333 W
Chiller Temperature Control	-6°C ~ 12°C
Number of Shelves	8
Effective Capacity	1053 L



MODEL HR-148MA-S

Dimension WxDxH	1400 x 800 x 2050 mm
Electrical Consumption	367 W
Chiller Temperature Control	-6°C ~ 12°C
Number of Shelves	8
Effective Capacity	1243 L



MODEL HR-188MA-S

Dimension WxDxH	1800 x 800 x 2050 mm
Electrical Consumption	413 W
Chiller Temperature Control	-6°C ~ 12°C
Number of Shelves	12
Effective Capacity	1720 L



MODEL HR-76MA-S

Dimension WxDxH	700 x 650 x 2050 mm
Electrical Consumption	237 W
Chiller Temperature Control	-6°C ~ 12°C
Number of Shelves	4
Effective Capacity	467 L



MODEL HR-126MA-S

Dimension WxDxH	1200 x 650 x 2050 mm
Electrical Consumption	343 W
Chiller Temperature Control	-6°C ~ 12°C
Number of Shelves	8
Effective Capacity	866 L



MODEL HR-146MA-S

Dimension WxDxH	1400 x 650 x 2050 mm
Electrical Consumption	343 W
Chiller Temperature Control	-6°C ~ 12°C
Number of Shelves	8
Effective Capacity	1021 L

Upright Freezer



MODEL HF-78MA-S

Dimension WxDxH	700 x 800 x 2050 mm
Electrical Consumption	469 W
Freezer Temperature Control	-23°C ~ -7°C
Number of Shelves	4
Effective Capacity	569 L



MODEL HF-128MA-S

Dimension WxDxH	1200 x 800 x 2050 mm
Electrical Consumption	700 W
Freezer Temperature Control	-23°C ~ -7°C
Number of Shelves	8
Effective Capacity	1047 L



MODEL HF-148MA-S

Dimension WxDxH	1400 x 800 x 2050 mm
Electrical Consumption	696 W
Freezer Temperature Control	-23°C ~ -7°C
Number of Shelves	8
Effective Capacity	1233 L



MODEL HF-188MA-S

Dimension WxDxH	1800 x 800 x 2050 mm
Electrical Consumption	917 W
Freezer Temperature Control	-23°C ~ -7°C
Number of Shelves	12
Effective Capacity	1622 L



MODEL HF-76MA-S

Dimension WxDxH	700 x 650 x 2050 mm
Electrical Consumption	419 W
Freezer Temperature Control	-23°C ~ -7°C
Number of Shelves	4
Effective Capacity	467 L



MODEL HF-126MA-S

Dimension WxDxH	1200 x 650 x 2050 mm
Electrical Consumption	696 W
Freezer Temperature Control	-23°C ~ -7°C
Number of Shelves	8
Effective Capacity	856 L



MODEL HF-146MA-S

Dimension WxDxH	1400 x 650 x 2050 mm
Electrical Consumption	696 W
Freezer Temperature Control	-23°C ~ -7°C
Number of Shelves	8
Effective Capacity	1011 L

Upright Dual Temp.



MODEL HRF-78MB-S

Dimension WxDxH	700 x 800 x 2050 mm
Electrical Consumption	576 W
Chiller Temperature Control	-2°C ~ 12°C
Freezer Temperature Control	-23°C ~ -11°C
Number of Shelves	4
Effective Capacity	448 L (Chiller: 234 L, Freezer: 214 L)



MODEL HRF-128MA-S

Dimension WxDxH	1200 x 800 x 2050 mm
Electrical Consumption	704 W
Chiller Temperature Control	-6°C ~ 12°C
Freezer Temperature Control	-23°C ~ -7°C
Number of Shelves	8
Effective Capacity	862 L (Chiller: 431 L, Freezer: 431 L)



MODEL HRF-148MA-S

Dimension WxDxH	1400 x 800 x 2050 mm
Electrical Consumption	808 W
Chiller Temperature Control	-6°C ~ 12°C
Freezer Temperature Control	-23°C ~ -7°C
Number of Shelves	8
Effective Capacity	1054 L (Chiller: 527 L, Freezer: 527 L)



MODEL HRF-188MA-S

Dimension WxDxH	1800 x 800 x 2050 mm
Electrical Consumption	844 W
Chiller Temperature Control	-6°C ~ 12°C
Freezer Temperature Control	-23°C ~ -7°C
Number of Shelves	12
Effective Capacity	1452 L (Chiller: 980 L, Freezer: 472 L)



Category	Product Group	Model Name	Effective Capacity		No. of Shelves	Temperature Control		Electric Consumption	Product Dimension (mm) W x D x H
			Chiller	Freezer		Chiller	Freezer		
A-fit	Upright	HR-78MA-S	569 L	-	4	-6°C to 12°C	-	238 W	700 x 800 x 2050
A-fit	Upright	HR-128MA-S	1053 L	-	8	-6°C to 12°C	-	333 W	1200 x 800 x 2050
A-fit	Upright	HR-148MA-S	1243 L	-	8	-6°C to 12°C	-	367 W	1400 x 800 x 2050
A-fit	Upright	HR-188MA-S	1644 L	-	12	-6°C to 12°C	-	430 W	1800 x 800 x 2050
A-fit	Upright	HR-76MA-S	467 L	-	4	-6°C to 12°C	-	237 W	700 x 650 x 2050
A-fit	Upright	HR-126MA-S	866 L	-	8	-6°C to 12°C	-	343 W	1200 x 650 x 2050
A-fit	Upright	HR-146MA-S	1021 L	-	8	-6°C to 12°C	-	343 W	1400 x 650 x 2050
A-fit	Upright	HF-78MA-S	569 L	-	4	-	-23°C to -7°C	469 W	700 x 800 x 2050
A-fit	Upright	HF-128MA-S	1047 L	-	8	-	-23°C to -7°C	700 W	1200 x 800 x 2050
A-fit	Upright	HF-148MA-S	1233 L	-	8	-	-23°C to -7°C	696 W	1400 x 800 x 2050
A-fit	Upright	HF-188MA-S	1622 L	-	12	-	-23°C to -7°C	917 W	1800 x 800 x 2050
A-fit	Upright	HF-76MA-S	467 L	-	4	-	-23°C to -7°C	419 W	700 x 650 x 2050
A-fit	Upright	HF-126MA-S	856 L	-	8	-	-23°C to -7°C	696 W	1200 x 650 x 2050
A-fit	Upright	HF-146MA-S	1011 L	-	8	-	-23°C to -7°C	696 W	1400 x 650 x 2050



Category	Model Name	Effective Capacity		No. of Shelves	Temperature Control		Electric Consumption	Product Dimension (mm) W x D x H
		Chiller	Freezer		Chiller	Freezer		
Dual Temp.	HRF-78MB-S	234 L	214 L	4	-2°C to 12°C	-23°C to -11°C	576 W	700 x 800 x 2050
Dual Temp.	HRF-128MA-S	431 L	431 L	8	-6°C to 12°C	-23°C to -7°C	704 W	1200 x 800 x 2050
Dual Temp.	HRF-148MA-S	527 L	527 L	8	-6°C to 12°C	-23°C to -7°C	808 W	1400 x 800 x 2050
Dual Temp.	HRF-188MA-S	980 L	472 L	12	-6°C to 12°C	-23°C to -7°C	844 W	1800 x 800 x 2050

Undercounter Refrigerator



MODEL RT-96MA-S

Dimension WxDxH	900 x 600 x 850 mm
Electrical Consumption	240 W
Chiller Temperature Control	-6°C ~ 12°C
Number of Shelves	2
Effective Capacity	151 L



MODEL RT-126MA-S

Dimension WxDxH	1200 x 600 x 850 mm
Electrical Consumption	245 W
Chiller Temperature Control	-6°C ~ 12°C
Number of Shelves	4
Effective Capacity	231 L



MODEL RT-156MA-S

Dimension WxDxH	1500 x 600 x 850 mm
Electrical Consumption	245 W
Chiller Temperature Control	-6°C ~ 12°C
Number of Shelves	4
Effective Capacity	318 L



MODEL RT-186MA-S

Dimension WxDxH	1800 x 600 x 850 mm
Electrical Consumption	280 W
Chiller Temperature Control	-6°C ~ 12°C
Number of Shelves	6
Effective Capacity	401 L



MODEL RT-98MA-S

Dimension WxDxH	900 x 750 x 850 mm
Electrical Consumption	240 W
Chiller Temperature Control	-6°C ~ 12°C
Number of Shelves	2
Effective Capacity	199 L



MODEL RT-128MA-S

Dimension WxDxH	1200 x 750 x 850 mm
Electrical Consumption	245 W
Chiller Temperature Control	-6°C ~ 12°C
Number of Shelves	4
Effective Capacity	307 L

Undercounter Low Drawer Refrigerator - Depth 750mm



MODEL RT-158MA-S

Dimension WxDxH	1500 x 750 x 850 mm
Electrical Consumption	245 W
Chiller Temperature Control	-6°C ~ 12°C
Number of Shelves	4
Effective Capacity	420 L



MODEL RT-188MA-S

Dimension WxDxH	1800 x 750 x 850 mm
Electrical Consumption	280 W
Chiller Temperature Control	-6°C ~ 12°C
Number of Shelves	6
Effective Capacity	502 L



MODEL RTL-108MA-SD

Dimension WxDxH	980 x 750 x 570 mm
Electrical Consumption	304 W
Chiller Temperature Control	-6°C ~ 12°C
Number of Drawers	2
Effective Capacity	85 L



MODEL RTL-148MA-SD

Dimension WxDxH	1400 x 750 x 570 mm
Electrical Consumption	324 W
Chiller Temperature Control	-6°C ~ 12°C
Number of Drawers	4
Effective Capacity	176 L



MODEL RTL-188MA-SD

Dimension WxDxH	1820 x 750 x 570 mm
Electrical Consumption	257 W
Chiller Temperature Control	-6°C ~ 12°C
Number of Drawers	6
Effective Capacity	267 L

Undercounter Freezer



MODEL FT-96MA-S

Dimension WxDxH	900 x 600 x 850 mm
Electrical Consumption	415 W
Freezer Temperature Control	-23°C ~ -7°C
Number of Shelves	2
Effective Capacity	151 L



MODEL FT-126MA-S

Dimension WxDxH	1200 x 600 x 850 mm
Electrical Consumption	410 W
Freezer Temperature Control	-23°C ~ -7°C
Number of Shelves	4
Effective Capacity	231 L



MODEL FT-98MA-S

Dimension WxDxH	900 x 750 x 850 mm
Electrical Consumption	420 W
Freezer Temperature Control	-23°C ~ -7°C
Number of Shelves	2
Effective Capacity	199 L



MODEL FT-128MA-S

Dimension WxDxH	1200 x 750 x 850 mm
Electrical Consumption	418 W
Freezer Temperature Control	-23°C ~ -7°C
Number of Shelves	4
Effective Capacity	307 L



MODEL FT-156MA-S

Dimension WxDxH	1500 x 600 x 850 mm
Electrical Consumption	415 W
Freezer Temperature Control	-23°C ~ -7°C
Number of Shelves	4
Effective Capacity	318 L



MODEL FT-186MA-S

Dimension WxDxH	1800 x 600 x 850 mm
Electrical Consumption	400 W
Freezer Temperature Control	-23°C ~ -7°C
Number of Shelves	6
Effective Capacity	401 L



MODEL FT-158MA-S

Dimension WxDxH	1500 x 750 x 850 mm
Electrical Consumption	415 W
Freezer Temperature Control	-23°C ~ -7°C
Number of Shelves	4
Effective Capacity	420 L



MODEL FT-188MA-S

Dimension WxDxH	1800 x 750 x 850 mm
Electrical Consumption	400 W
Freezer Temperature Control	-23°C ~ -7°C
Number of Shelves	6
Effective Capacity	502 L

Undercounter Low Drawer Freezer



MODEL FTL-148MA-SD

Dimension WxDxH	1400 x 750 x 570 mm
Electrical Consumption	476 W
Freezer Temperature Control	-23°C ~ -7°C
Number of Drawers	4
Effective Capacity	176 L

Prep Table



MODEL	RT-128MA-S-PR	RT-158MA-S-PR	RT-188MA-S-PR
Dimension WxDxH	1200 x 750 x 850 mm	1500 x 750 x 850 mm	1800 x 750 x 850 mm
Electrical Consumption	78 W	141 W	416 W
Chiller Temperature Control	-2°C ~ 12°C	-2°C ~ 12°C	-2°C ~ 12°C
Number of Shelves	4	4	6
Effective Capacity	304 L	410 L	517 L

Prep Table (Cover + Cutting Board)



MODEL	RT-128MA-S-PRS	RT-158MA-S-PRS	RT-188MA-S-PRS
Dimension WxDxH	1200 x 750 x 1076 mm	1500 x 750 x 1100 mm	1800 x 750 x 1100 mm
Electrical Consumption	78 W	141 W	416 W
Chiller Temperature Control	-2°C ~ 12°C	-2°C ~ 12°C	-2°C ~ 12°C
Number of Shelves	4	4	6
Effective Capacity	304 L	410 L	517 L

Category	Product Group	Model Name	Effective Capacity	No. of Shelves	Temperature Control	Electric Consumption	Product Dimension (mm)
							W x D x H
A-fit	Upright (Swing Glass Door)	HR-78MA-SG	600 L	4	-2°C to 12°C	306 W	700 x 800 x 2050
A-fit	Upright (Swing Glass Door)	HR-128MA-SG	1110 L	8	-2°C to 12°C	390 W	1200 x 800 x 2050
A-fit	Upright (Swing Glass Door)	HR-148MA-SG	1310 L	8	-2°C to 12°C	481 W	1400 x 800 x 2050
A-fit	Upright (Swing Glass Door)	HR-188MA-SG	1720 L	12	-2°C to 12°C	614 W	1800 x 800 x 2050
A-fit	Upright (Swing Glass Door)	HR-76MA-SG	467 L	4	-2°C to 12°C	463 W	700 x 650 x 2050
A-fit	Upright (Swing Glass Door)	HR-126MA-SG	866 L	8	-2°C to 12°C	533 W	1200 x 650 x 2050
A-fit	Upright (Swing Glass Door)	HR-146MA-SG	1021 L	8	-2°C to 12°C	559 W	1400 x 650 x 2050
A-fit	U/C (Sliding Glass Door)	RT-96MA-SG	151 L	2	-2°C to 12°C	275 W	900 x 600 x 850
A-fit	U/C (Sliding Glass Door)	RT-126MA-SG	231 L	4	-2°C to 12°C	229 W	1200 x 600 x 850
A-fit	U/C (Sliding Glass Door)	RT-156MA-SG	318 L	4	-2°C to 12°C	241 W	1500 x 600 x 850
A-fit	U/C (Sliding Glass Door)	RT-186MA-SG	401 L	6	-2°C to 12°C	264 W	1800 x 600 x 850
A-fit	U/C (Sliding Glass Door)	RT-98MA-SG	199 L	2	-2°C to 12°C	201 W	900 x 750 x 850
A-fit	U/C (Sliding Glass Door)	RT-128MA-SG	307 L	4	-2°C to 12°C	224 W	1200 x 750 x 850
A-fit	U/C (Sliding Glass Door)	RT-158MA-SG	420 L	4	-2°C to 12°C	241 W	1500 x 750 x 850
A-fit	U/C (Sliding Glass Door)	RT-188MA-SG	502 L	6	-2°C to 12°C	264 W	1800 x 750 x 850
A-fit	Upright (Long Glass Door)	HR-76MA-SLG	467 L	4	-2°C to 12°C	463 W	700 x 650 x 2050
A-fit	Upright (Long Glass Door)	HR-126MA-SLG	866 L	8	-2°C to 14°C	523 W	1200 x 650 x 2050
A-fit	Upright (Long Glass Door)	HR-78MA-SLG	569 L	4	-2°C to 13°C	463 W	700 x 800 x 2050
A-fit	Upright (Long Glass Door)	HR-128MA-SLG	1053 L	8	-2°C to 15°C	533 W	1200 x 800 x 2050
A-fit	U/C (Swing Glass Door)	RT-126MA-SSG	231 L	4	-2°C to 12°C	295 W	1200 x 600 x 850
A-fit	U/C (Swing Glass Door)	RT-156MA-SSG	318 L	4	-2°C to 12°C	315 W	1500 x 600 x 850
A-fit	U/C (Swing Glass Door)	RT-186MA-SSG	401 L	6	-2°C to 12°C	315 W	1800 x 600 x 850
A-fit	U/C (Swing Glass Door)	RT-128MA-SSG	307 L	4	-2°C to 12°C	247 W	1200 x 750 x 850
A-fit	U/C (Swing Glass Door)	RT-158MA-SSG	420 L	4	-2°C to 12°C	260 W	1500 x 750 x 850
A-fit	U/C (Swing Glass Door)	RT-188MA-SSG	502 L	6	-2°C to 12°C	280 W	1800 x 750 x 850

Category	Product Group	Model Name	Effective Capacity	No. of Shelves	Temperature Control	Electric Consumption	Product Dimension (mm)
							W x D x H
A-fit	Prep Table	RT-128MA-S-PR	304 L	4	-2°C to 12°C	267 W	1200 x 750 x 850
A-fit	Prep Table	RT-158MA-S-PR	410 L	4	-2°C to 12°C	416 W	1500 x 750 x 850
A-fit	Prep Table	RT-188MA-S-PR	517 L	6	-2°C to 12°C	416 W	1800 x 750 x 850
A-fit	Prep Table (Cover + Cutting Board)	RT-128MA-S-PRS	304 L	4	-2°C to 12°C	267 W	1200 x 750 x 1076
A-fit	Prep Table (Cover + Cutting Board)	RT-158MA-S-PRS	410 L	4	-2°C to 12°C	416 W	1500 x 750 x 1100
A-fit	Prep Table (Cover + Cutting Board)	RT-188MA-S-PRS	517 L	6	-2°C to 12°C	416 W	1800 x 750 x 1100



INVERTER MODEL SPECIFICATIONS

Category	Product Group	Model Name	Effective Capacity	No. of Shelves	Temperature Control		Annual Electric Consumption	Product Dimension (mm) W x D x H
					Chiller	Freezer		
Inverter	Upright	HR-63AT-1	384 L	4	-6°C to 12°C	-	310 kWh	625 x 600 x 1910
Inverter	Upright	HR-75AT-1	481 L	4	-6°C to 12°C	-	360 kWh	750 x 600 x 1910
Inverter	Upright	HR-120AT-1	819 L	8	-6°C to 12°C	-	430 kWh	1200 x 600 x 1910
Inverter	Upright	HR-150AT-1	1049 L	8	-6°C to 12°C	-	550 kWh	1500 x 650 x 1910
Inverter	Upright	HR-180AT-1	1271 L	12	-6°C to 12°C	-	610 kWh	1800 x 650 x 1910
Inverter	Upright	HR-63A-1	493 L	4	-6°C to 12°C	-	330 kWh	625 x 800 x 1910
Inverter	Upright	HR-75A-1	616 L	4	-6°C to 12°C	-	370 kWh	750 x 800 x 1910
Inverter	Upright	HR-120A-1	1049 L	8	-6°C to 12°C	-	440 kWh	1200 x 800 x 1910
Inverter	Upright	HR-150A-1	1342 L	8	-6°C to 12°C	-	550 kWh	1500 x 800 x 1910
Inverter	Upright	HR-180A-1	1627 L	12	-6°C to 12°C	-	610 kWh	1800 x 800 x 1910
Inverter	Upright	HF-63AT-1	384 L	4	-	-25°C to -7°C	950 kWh	625 x 650 x 1910
Inverter	Upright	HF-75AT-1	481 L	4	-	-25°C to -7°C	1050 kWh	750 x 650 x 1910
Inverter	Upright	HF-120AT-2	812 L	8	-	-25°C to -7°C	1690 kWh	1200 x 650 x 1910
Inverter	Upright	HF-150AT3-2 (415V/3PH)	1042 L	8	-	-25°C to -7°C	2110 kWh*	1500 x 650 x 1910
Inverter	Upright	HF-180AT3-2	1264 L	12	-	-25°C to -7°C	2720 kWh	1800 x 650 x 1910
Inverter	Upright	HF-63A-1	493 L	4	-	-25°C to -7°C	1010 kWh	625 x 800 x 1910
Inverter	Upright	HF-75A-1	616 L	4	-	-25°C to -7°C	1110 kWh	750 x 800 x 1910
Inverter	Upright	HF-120A-2	1042 L	8	-	-25°C to -7°C	1730 kWh	1200 x 800 x 1910
Inverter	Upright	HF-150A3-2	1335 L	8	-	-25°C to -7°C	2340 kWh	1500 x 800 x 1910
Inverter	Upright	HF-180A3-2	1620 L	12	-	-25°C to -7°C	3030 kWh	1800 x 800 x 1910
Inverter	Undercounter	RT-90SNG-1	157 L	2	-6°C to 12°C	-	220 kWh	900 x 600 x 800
Inverter	Undercounter	RT-120SNG-1	243 L	4	-6°C to 12°C	-	260 kWh	1200 x 600 x 800
Inverter	Undercounter	RT-150SNG-1	333 L	4	-6°C to 12°C	-	300 kWh	1500 x 600 x 800
Inverter	Undercounter	RT-180SNG-1	419 L	6	-6°C to 12°C	-	360 kWh	1800 x 600 x 800
Inverter	Undercounter	RT-90SDG-1	206 L	2	-6°C to 12°C	-	230 kWh	900 x 750 x 800
Inverter	Undercounter	RT-120SDG-1	319 L	4	-6°C to 12°C	-	280 kWh	1200 x 750 x 800
Inverter	Undercounter	RT-150SDG-1	436 L	4	-6°C to 12°C	-	320 kWh	1500 x 750 x 800
Inverter	Undercounter	RT-180SDG-1	549 L	6	-6°C to 12°C	-	380 kWh	1800 x 750 x 800
Inverter	Undercounter	FT-90SNG-1	157 L	2	-	-25°C to -7°C	630 kWh	900 x 600 x 800
Inverter	Undercounter	FT-120SNG-1	243 L	4	-	-25°C to -7°C	850 kWh	1200 x 600 x 800
Inverter	Undercounter	FT-150SNG-1	335 L	4	-	-25°C to -7°C	950 kWh	1500 x 600 x 800
Inverter	Undercounter	FT-180SNG-1	419 L	6	-	-25°C to -7°C	1280 kWh	1800 x 600 x 800
Inverter	Undercounter	FT-90SDG-1	206 L	2	-	-25°C to -7°C	630 kWh	900 x 750 x 800
Inverter	Undercounter	FT-120SDG-1	319 L	4	-	-25°C to -7°C	890 kWh	1200 x 750 x 800
Inverter	Undercounter	FT-150SDG-1	436 L	4	-	-25°C to -7°C	1080 kWh	1500 x 750 x 800
Inverter	Undercounter	FT-180SDG-1	549 L	6	-	-25°C to -7°C	1340 kWh	1800 x 750 x 800
Inverter	Undercounter	RFT-120SNG-1	220 L	4	-6°C to 12°C	-25°C to -7°C	850 kWh	1200 x 600 x 800
Inverter	Undercounter	RFT-150SNG-1	310 L	4	-6°C to 12°C	-25°C to -7°C	990 kWh	1500 x 600 x 800
Inverter	Undercounter	RFT-180SNG-1	396 L	6	-6°C to 12°C	-25°C to -7°C	1100 kWh	1800 x 600 x 800
Inverter	Undercounter	RFT-120SDG-1	290 L	4	-6°C to 12°C	-25°C to -7°C	920 kWh	1200 x 750 x 800
Inverter	Undercounter	RFT-150SDG-1	406 L	4	-6°C to 12°C	-25°C to -7°C	1050 kWh	1500 x 750 x 800
Inverter	Undercounter	RFT-180SDG-1	519 L	6	-6°C to 12°C	-25°C to -7°C	1140 kWh	1800 x 750 x 800
Inverter	Showcase	RSC-90E	533 L	8	-0°C to 10°C	-	550 kWh	900 x 650 x 1880
Inverter	Showcase	RSC-120E	744 L	8	-0°C to 10°C	-	610 kWh	1200 x 650 x 1880
Inverter	Showcase	RSC-90ET	311 L	8	-0°C to 10°C	-	520 kWh	900 x 450 x 1880
Inverter	Showcase	RSC-120ET	440 L	8	-0°C to 10°C	-	570 kWh	1200 x 450 x 1880

*415v / 3Ph



GOLDLINE MODEL

Undercounter
Drawer Refrigerator -
Depth 750mm



MODEL RTC-125DDA-GN-6D

Dimension WxDxH
Electrical Consumption
Chiller Temperature Control
Number of Drawers
Effective Capacity

1250 x 750 x 850 mm
315 W
-6°C ~ 12°C
6
296 L

MODEL RTC-167DDA-GN-9D

1670 x 750 x 850 mm
315 W
-6°C ~ 12°C
9
443 L



MODEL FTC-125DDA

Dimension WxDxH
Electrical Consumption
Chiller Temperature Control
Number of Drawers
Effective Capacity

1250 x 750 x 850 mm
527 W
-23°C ~ -7°C
6
294 L

SUSHI SHOWCASE

Refrigerated sushi showcases functions to ensure the freshness of produce and as a point of attraction when placed on the sushi counter. Hoshizaki's sushi showcases are designed with curved glass provide an aesthetic edge while its powerful cooling performance with stable humidity and temperature control keeps sushi fresh without drying it out. Left or right option refrigerant panel ensure flexibility of placement on the counter.



MODEL HNC-120BE-L-B

Dimension WxDxH	1200 x 345 x 270 mm
Electrical Consumption	150 W
Saturation Ambient Temp 27°C	approx. 4°C
Door (Sliding Glass) WxH	2 (435 x 172 mm)
Effective Capacity	42 L



MODEL HNC-120BE-R-B

Dimension WxDxH	1200 x 345 x 270 mm
Electrical Consumption	150 W
Saturation Ambient Temp 27°C	approx. 4°C
Door (Sliding Glass) WxH	2 (435 x 172 mm)
Effective Capacity	42 L

SUSHI SHOWCASE



MODEL HNC-150BE-L-B

Dimension WxDxH	1500 x 345 x 270 mm
Electrical Consumption	150 W
Saturation Ambient Temp 27°C	approx. 4°C
Door (Sliding Glass) WxH	4 (293 x 172 mm)
Effective Capacity	57 L



MODEL HNC-150BE-R-B

Dimension WxDxH	1200 x 345 x 270 mm
Electrical Consumption	150 W
Saturation Ambient Temp 27°C	approx. 4°C
Door (Sliding Glass) WxH	4 (293 x 172 mm)
Effective Capacity	57 L



MODEL HNC-180BE-L-B

Dimension WxDxH	1800 x 345 x 270 mm
Electrical Consumption	150 W
Saturation Ambient Temp 27°C	approx. 4°C
Door (Sliding Glass) WxH	4 (368 x 172 mm)
Effective Capacity	72 L



MODEL HNC-180BE-R-B

Dimension WxDxH	1800 x 345 x 270 mm
Electrical Consumption	150 W
Saturation Ambient Temp 27°C	approx. 4°C
Door (Sliding Glass) WxH	4 (368 x 172 mm)
Effective Capacity	72 L

SUSHI SHOWCASE SPECIFICATIONS

Category	Model Name	Effective Capacity	Saturation Ambient	Pull Down Time	Electric Consumption	Product Dimension (mm)
			Temperature 27°C			W x D x H
Showcase	HNC-120BE-L/R-B	42 L	approx. 4°C	approx. 30min (30°C > 10°C)	150W	1200 x 345 x 270
Showcase	HNC-150BE-L/R-B	57 L	approx. 4°C	approx. 30min (30°C > 10°C)	150W	1500 x 345 x 270
Showcase	HNC-180BE-L/R-B	72 L	approx. 4°C	approx. 30min (30°C > 10°C)	150W	1800 x 345 x 270

Refrigerator Display Case - Not For Overnight Storage

DISHWASHER

Hoshizaki introduces the high performance and low water consumption efficient dishwashing solution for your busy kitchen. Simple and compact in size, our dishwasher is designed to take the load off your operations with an easy to operate unit for small to medium size establishments.



MODEL	HW-600B3 PDRT	HW-320B-S PDRT
Dimension WxDxH	707 x 779 x 1485 (1948) mm	595 x 645 x 830 mm
Electrical Consumption	9.7 - 11.5 kW	5.2 - 6.1 kW
Washing Capacity Racks per Hour	69 / 35 / 27 / 23 / 18	35 / 27 / 23 / 20 / 18
Water Consumption Per Rack	1.50 L	1.50 L
Per Plate	0.10 L	0.10 L
Max Noise	67 dBA	65 dBA

DISHWASHER SPECIFICATIONS

Category	Product Group	Model Name	Temperature Control		Water Consumption		Electric Consumption	Maximum Noise	Product Dimension (mm) W x D x H
			Washing (°C)	Rinsing (°C)	Per Rack	Per Plate			
Dishwasher	Hood-Type	HW-600B3 PDRT	55 - 60	80 - 85	1.50 L	0.10 L	9.7 - 11.5 kW	67dBA	707 x 779 x 1485
Dishwasher	Undercounter	HW-320B-S PDRT	55 - 60	80 - 85	1.10 L	0.10 L	5.2 - 6.1 kW	65dBA	595 x 645 x 830

Our dishwasher's water consumption performance excels under PUB's Mandatory Water Efficiency Labelling Scheme (MWELS)